



Explanations see practical informations on page 6 and 84!


FLOOR SAFETY ELEMENTS 55

Water-endangering and flammable liquids are subject to strict safety regulations, not only for storage but also for daily routine procedures such as filling off, handling and transport. According to the regulations even empty containers must be stored by means of sump trays. This means that favourably priced solutions are required in accordance with the regulations. Floor safety elements are available for such cases.

- ◆ Made from 3 mm sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ Approved for water-endangering and flammable liquids
- ◆ Individual segments can be combined with each other optionally
- ◆ Distance between elements: 40 mm throughout
- ◆ With removable heavy-duty fire-galvanized grids
- ◆ Can be driven over by pallet trucks, on request by fork-lift trucks or road vehicles
- ◆ Galvanized for high corrosion protection

Range of applications:


- ◆ Empty container stores
- ◆ Laying of transport paths
- ◆ Revision of transformers
- ◆ Protection against splashes and leaks

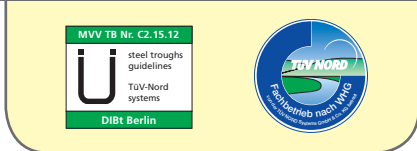

Model	BS 14.14 / 55	BS 19.14 / 55	BS 29.14 / 55	BS 29.19 / 55
Base area W x D (mm)	1350 x 1400	1900 x 1350	2850 x 1400	2850 x 1900
Element height (mm)	55	55	55	55
Sump capacity (l)	43	60	91	124
Wheel load (kg)	450	450	450	450
Max. load (kg/m ²)	5000	5000	5000	5000
Weight (kg)	140	186	285	380
Article no., galvanized	P25-1200-B	P25-1201-B	P25-1202-B	P25-1203-B

Accessories	Drive-on ramps				Drive-on corner
Type	AF 13 / 55	AF 14 / 55	AF 19 / 55	AF 29 / 55	AE 55
Base area W x D (mm)	1350 x 550	1400 x 550	1900 x 550	2850 x 550	550 x 550
Wheel load (kg)	450	450	450	450	450
Weight (kg)	40	42	59	85	42
Article no., galvanized	P25-1210-A	P25-1211-A	P25-1212-A	P25-1213-A	P25-1226-A

Accessories	Element connectors			
Type	VB 13	VB 14	VB 19	VB 29
Dimensions W x D (mm)	52 x 1320	52 x 1370	52 x 1870	52 x 2820
Article no., galvanized	P25-1220-A	P25-1221-A	P25-1222-A	P25-1223-A

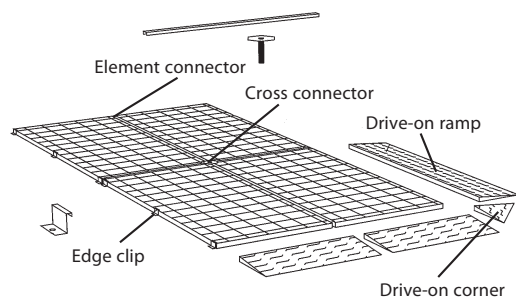


i Other sizes available on request!

Accessories	Edge clips and cross connectors	
Type	RK 55	KK 55
Dimensions W x D (mm)	100 x 30	120 x 120
Article no., galvanized	P25-1224-A	P25-1225-A





FLOOR SAFETY ELEMENTS 78


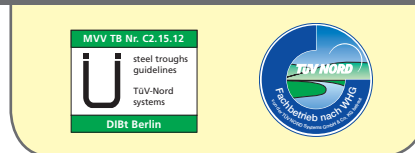


- ◆ Particularly suitable for equipping individual rooms.
Custom-made versions available!

Model	BS 14.14 / 78	BS 19.14 / 78	BS 29.14 / 78	BS 29.19 / 78
Base area W x D (mm)	1350 x 1400	1900 x 1350	2850 x 1400	2850 x 1900
Element height (mm)	78	78	78	78
Sump capacity (l)	84	119	178	242
Wheel load (kg)	450	450	450	450
Max. load (kg/m ²)	5000	5000	5000	5000
Weight (kg)	134	187	287	387
Article no., galvanized	P25-1204-B	P25-1205-B	P25-1206-B	P25-1207-B

Accessories	Drive-on ramps				Drive-on corner
Type	AF 13 / 78	AF 14 / 78	AF 19 / 78	AF 29 / 78	AE 78
Base area W x D (mm)	1350 x 730	1400 x 730	1900 x 730	2850 x 730	730 x 730
Wheel load (kg)	450	450	450	450	450
Weight (kg)	60	65	85	120	55
Article no., galvanized	P25-1214-A	P25-1215-A	P25-1216-A	P25-1217-A	P25-1227-A

Accessories	Element connectors			
Type	VB 13	VB 14	VB 19	VB 29
Dimensions W x D (mm)	52 x 1320	52 x 1370	52 x 1870	52 x 2820
Article no., galvanized	P25-1220-A	P25-1221-A	P25-1222-A	P25-1223-A

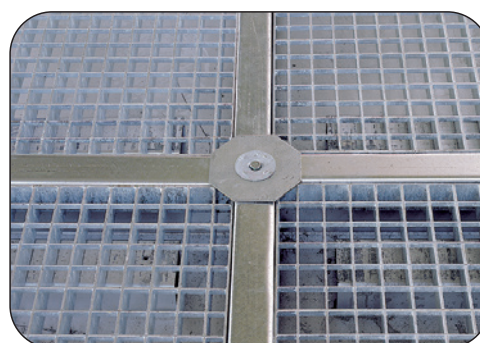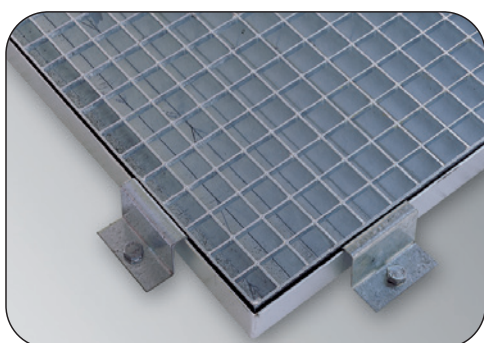

Accessories	Edge clips and cross connectors		
Type	RK 78	KK 78	
Dimensions W x D (mm)	100 x 30	120 x 120	
Article no., galvanized	P25-1229-A	P25-1228-A	





Explanations see practical informations on page 6 and 84!

FLOOR SAFETY ELEMENTS 123

For the storage of water-endangering and flammable liquids

- ◆ Made from 3 mm sheet steel
- ◆ Base sump tray according to WHG - **Ü-sign according to StawaR**
- ◆ Individual segments can be combined with each other optionally
- ◆ With removable heavy-duty fire-galvanized grids
- ◆ Galvanized for high corrosion protection

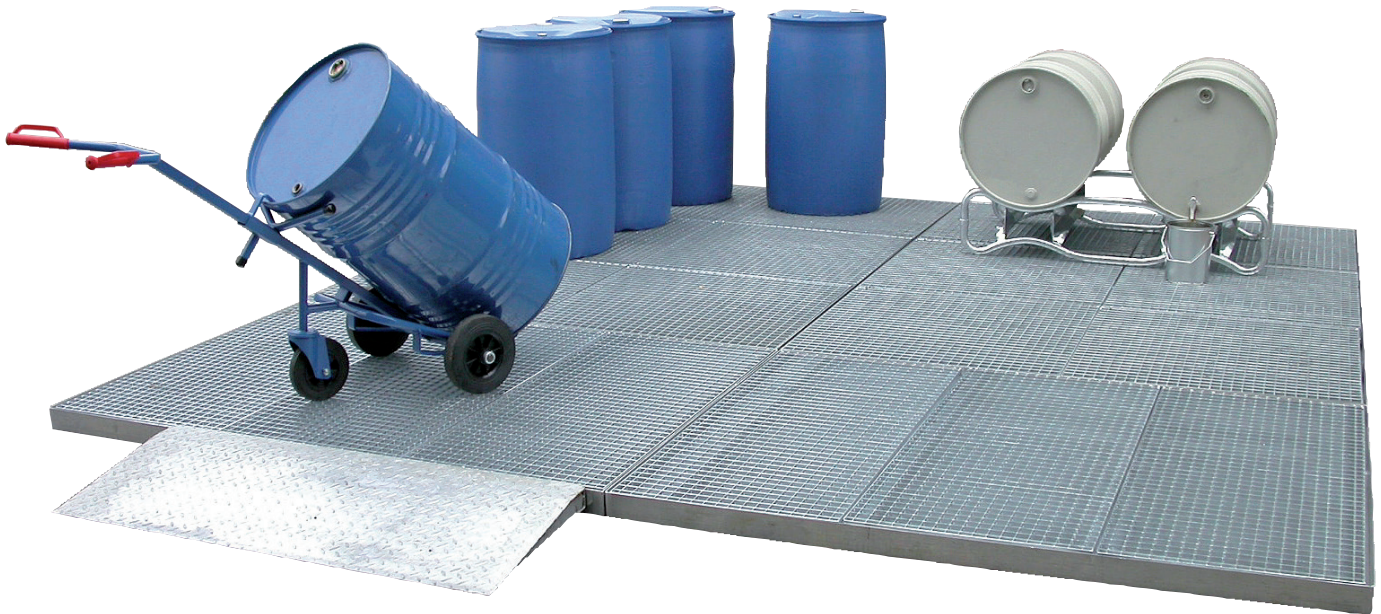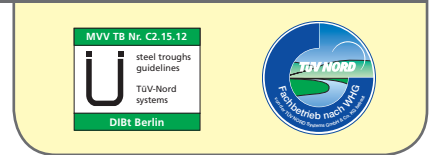

Model	BS 05.05 / 123	BS 10.05 / 123	BS 20.05 / 123	BS 25.05 / 123	BS 10.10 / 123	BS 20.10 / 123	BS 25.10 / 123
Base area W x D (mm)	500 x 500	1000 x 500	2000 x 500	2500 x 500	1000 x 1000	2000 x 1000	2500 x 1000
Element height (mm)	123	123	123	123	123	123	123
Sump capacity (l)	20	40	85	100	80	160	210
Wheel load (kg)	450	450	450	450	450	450	450
Max. load (kg/m ²)	5000	5000	5000	5000	5000	5000	5000
Weight (kg)	28	52	100	125	83	162	201
Article no., galvanized	P25-1240-B	P25-1241-B	P25-1246-B	P25-1242-B	P25-1243-B	P25-1244-B	P25-1245-B

Accessories	Drive-on ramps				Drive-on corner	
Type	AF 05 / 123	AF 10 / 123	AF 20 / 123	AF 25 / 123*	AE 123	
Base area W x D (mm)	450 x 1150	950 x 1150	1950 x 1150	2450 x 1150	1150 x 1150	
Wheel load (kg)	500	500	500	500	500	
Weight (kg)	41	69	141	175	39	
Article no., galvanized	P25-1260-B	P25-1261-B	P25-1262-B	P25-1263-C	P25-1264-B	

Accessories	Element connectors			
Type	VB 047	VB 097	VB 20	VB 25
Dimensions W x D (mm)	52 x 470	52 x 970	52 x 1970	52 x 2470
Article no., galvanized	P25-1250-B	P25-1251-B	P25-1252-B	P25-1253-B

Accessories	Edge clips and cross connectors	
Type	RK 123	KK 123
Dimensions W x D (mm)	100 x 30	120 x 120
Article no., galvanized	P25-1254-B	P25-1255-B

Accessory	Ramp connectors
Type	RV 123
Dimensions H x W x L (mm)	123 x 90 x 1150
Article no., galvanized	P25-1256-B


* delivered in two parts




MODULAR SURFACE PROTECTION SYSTEM

Suitable for use as mobile filling, transferring and / or tanking area with Ü-Sign

- ◆ Stable surface protection element
- ◆ 5/7 mm tear-drop flooring, primed and painted in RAL 7016 - anthracite
- ◆ Welded leak-proof, with specific test report
- ◆ Suitable for vehicles with a wheel load up to 3 tons
- ◆ Can be extended/retrofitted at will
- ◆ Other sizes and sump capacities available on request
- ◆ Supplied as individual modules for laying down quickly and easily ---> **READY FOR IMMEDIATE USE**
- ◆ **Floor anchors are not required as the elements are firmly laid by their own weight.**

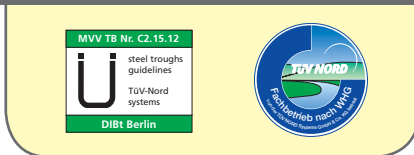

Mobile provisioning area

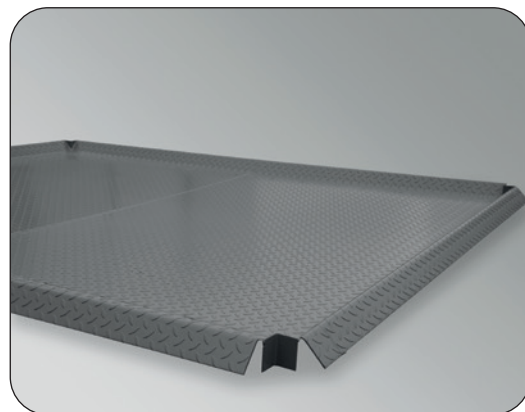

Accessible, non-slip surface, can be expanded as required



Refueling of vehicles:
Leaking fuel is retained
on the module system.

Model	Basic element FSS-M1	Extension panel FSS-M2
Base area W x D (mm)	2920 x 2380	2920 x 2380
System height (mm)	73	73
Sump capacity (l)	210	210
Weight (kg)	315	315
Article no., painted	P25-1300-A	P25-1301-A